



Post Mount

Powder Coated Aluminum



Included Components

- (1) Post Mount
(2½", 3¼", 4" sizes available)
- (1) Leveling Plate (optional)
- (4) ⅜" x ½" Set Screws
- (1) T-30 Torx bit
(Post Cap & Trim optional)

Fasteners not included

Recommended Tools


- Safety Glasses
- Tape Measure & Pencil
- Power Drill w/ ⅜" x 5" bit
- Level

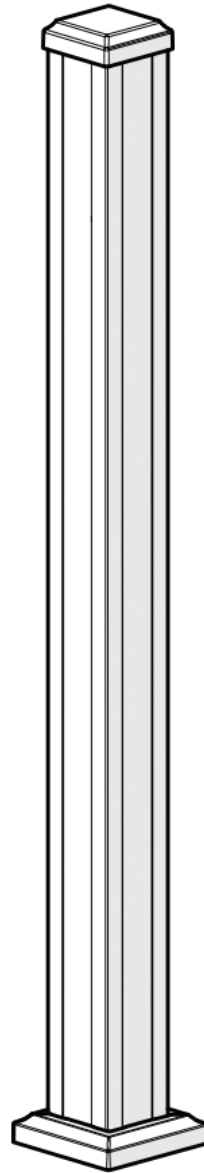

Note: Because building codes vary from one region to another; consult your local building codes to determine acceptable post placement and railing height.

Space Posts according to application and Top Rail length. Place leveling plate (highlighted) between Post and mounting surface.

Attach to structural surface using bolts or lags (not included). Partially Tighten prior to levelling. Using ⅜" Allen wrench, turn set screws to level post. Then fully tighten structural screws.

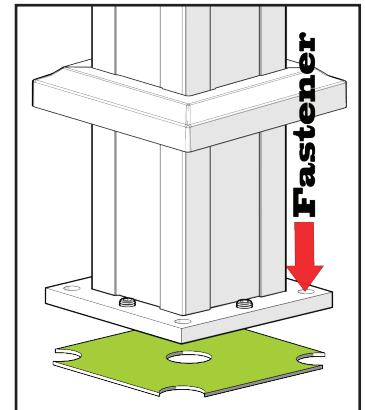

- These directions are only a guide and may not address every situation.
- Always wear proper safety equipment while assembling and installing.
- The installer should obtain all required building permits and follow all installation procedures in accordance with applicable building code requirements.
- Key-Link Fencing and Railing Inc. shall not be held liable for improper or unsafe installations.
- Applying paint, other than Key-Link's touch up paint, will void your warranty.
- To ensure proper coverage by our warranty please visit our website and complete the warranty form and mail to: Key-Link Fencing & Railing, Inc., 150 Orlan Road, New Holland, PA 17557